


# Assembly Instructions




Curved Fabric Clip  
SAU25A

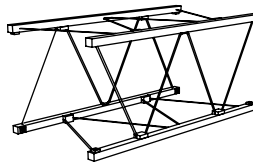

# STOWaway®

PAT.US 6,715,255 B2


## Folding Truss System

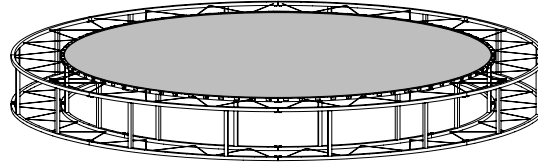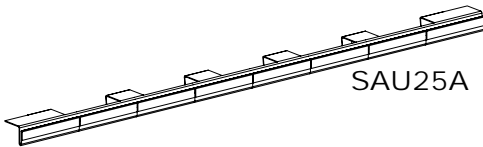

END VIEW


### Step 1

Gently form the **Fabric Clip** onto the **Truss** at the desired location.

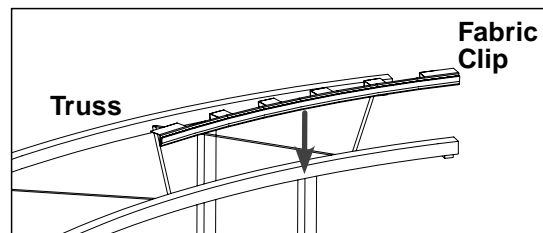


### Step 2

Slide the magnetic edge of the **Fabric** into the fabric clip. The magnet will lock the fabric into position.

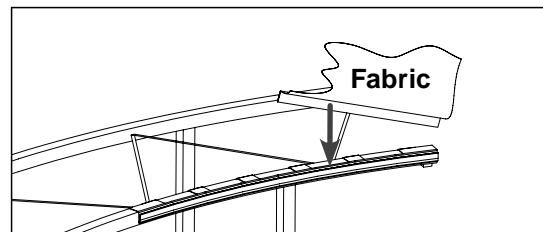

### Step 3

Then pull the Fabric moderately taut at a 90° angle to the magnet in either direction and repeat Step 2 for the other end. This will secure the fabric in place.

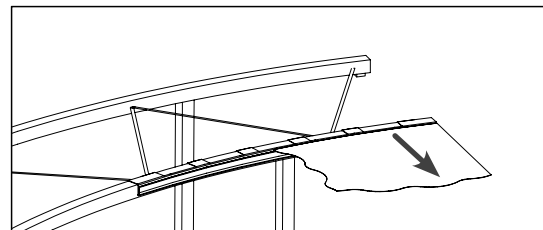

### Curved Fabric Clip Notes:

1. Clips may not be able to run consecutively.
2. Some gaps of up to 4" are acceptable and should not reduce the effectiveness of the clips.
3. Clips may be modified by trimming length or removing tabs where there is lacing interference.

### Fabric Graphic Panel & Magnet Notes:

1. Fabric Panel should be 1" larger than outside dimensions of the truss (1/2" each side).
2. Critical! Artwork should be 2 1/2" away from the edge of the panel due to deformity from stretching.
3. Contact your fabric printing specialist for recommended types of fabric or ask Interlock for sources.
4. The magnet size should be 1/2" x 1/16".
5. Recommended attachment of the magnet is sewing it to the fabric.

**IMPORTANT:** All notes are recommendations and do not account for variances in the fabric and production of the graphics.

46121 - 04/23/07



Member

7316 Aspen Lane North  
suite 300  
Minneapolis MN 55428-1109

e mail: [info@interlockstructures.com](mailto:info@interlockstructures.com)  
web: [www.interlock.biz](http://www.interlock.biz)

# INTERLOCK®

Interlock Structures International, Inc.

voice: 763.425.1464  
800.468.1497  
fax: 763.425.8205